

Doppler Ultrasonic Flowmeter

General:

The DF6100 Doppler ultrasonic flow meter is designed to measure volumetric flow of solids-bearing or aerated liquid within closed conduit, the pipe line must be full of liquids, and there must be a certain amount of air bubbles or suspended solids in liquid.

Transducers are clamp-on(DF6100-EC/EP) or hot-tapped insertion(DF6100-EI) types, user don't need to shut down the pipe flow when install transducers.

The Doppler ultrasonic flow meter can display flow rate and flow totalizer, etc., and is configured with 4-20mA, Relays, OCT outputs.


Applications:

- Raw sewage
- Activated sludge
- Ground water
- Pulp and paper slurries
- Chemical slurries
- Drainage
- Mining recirculation

01



Principle of Measurement:

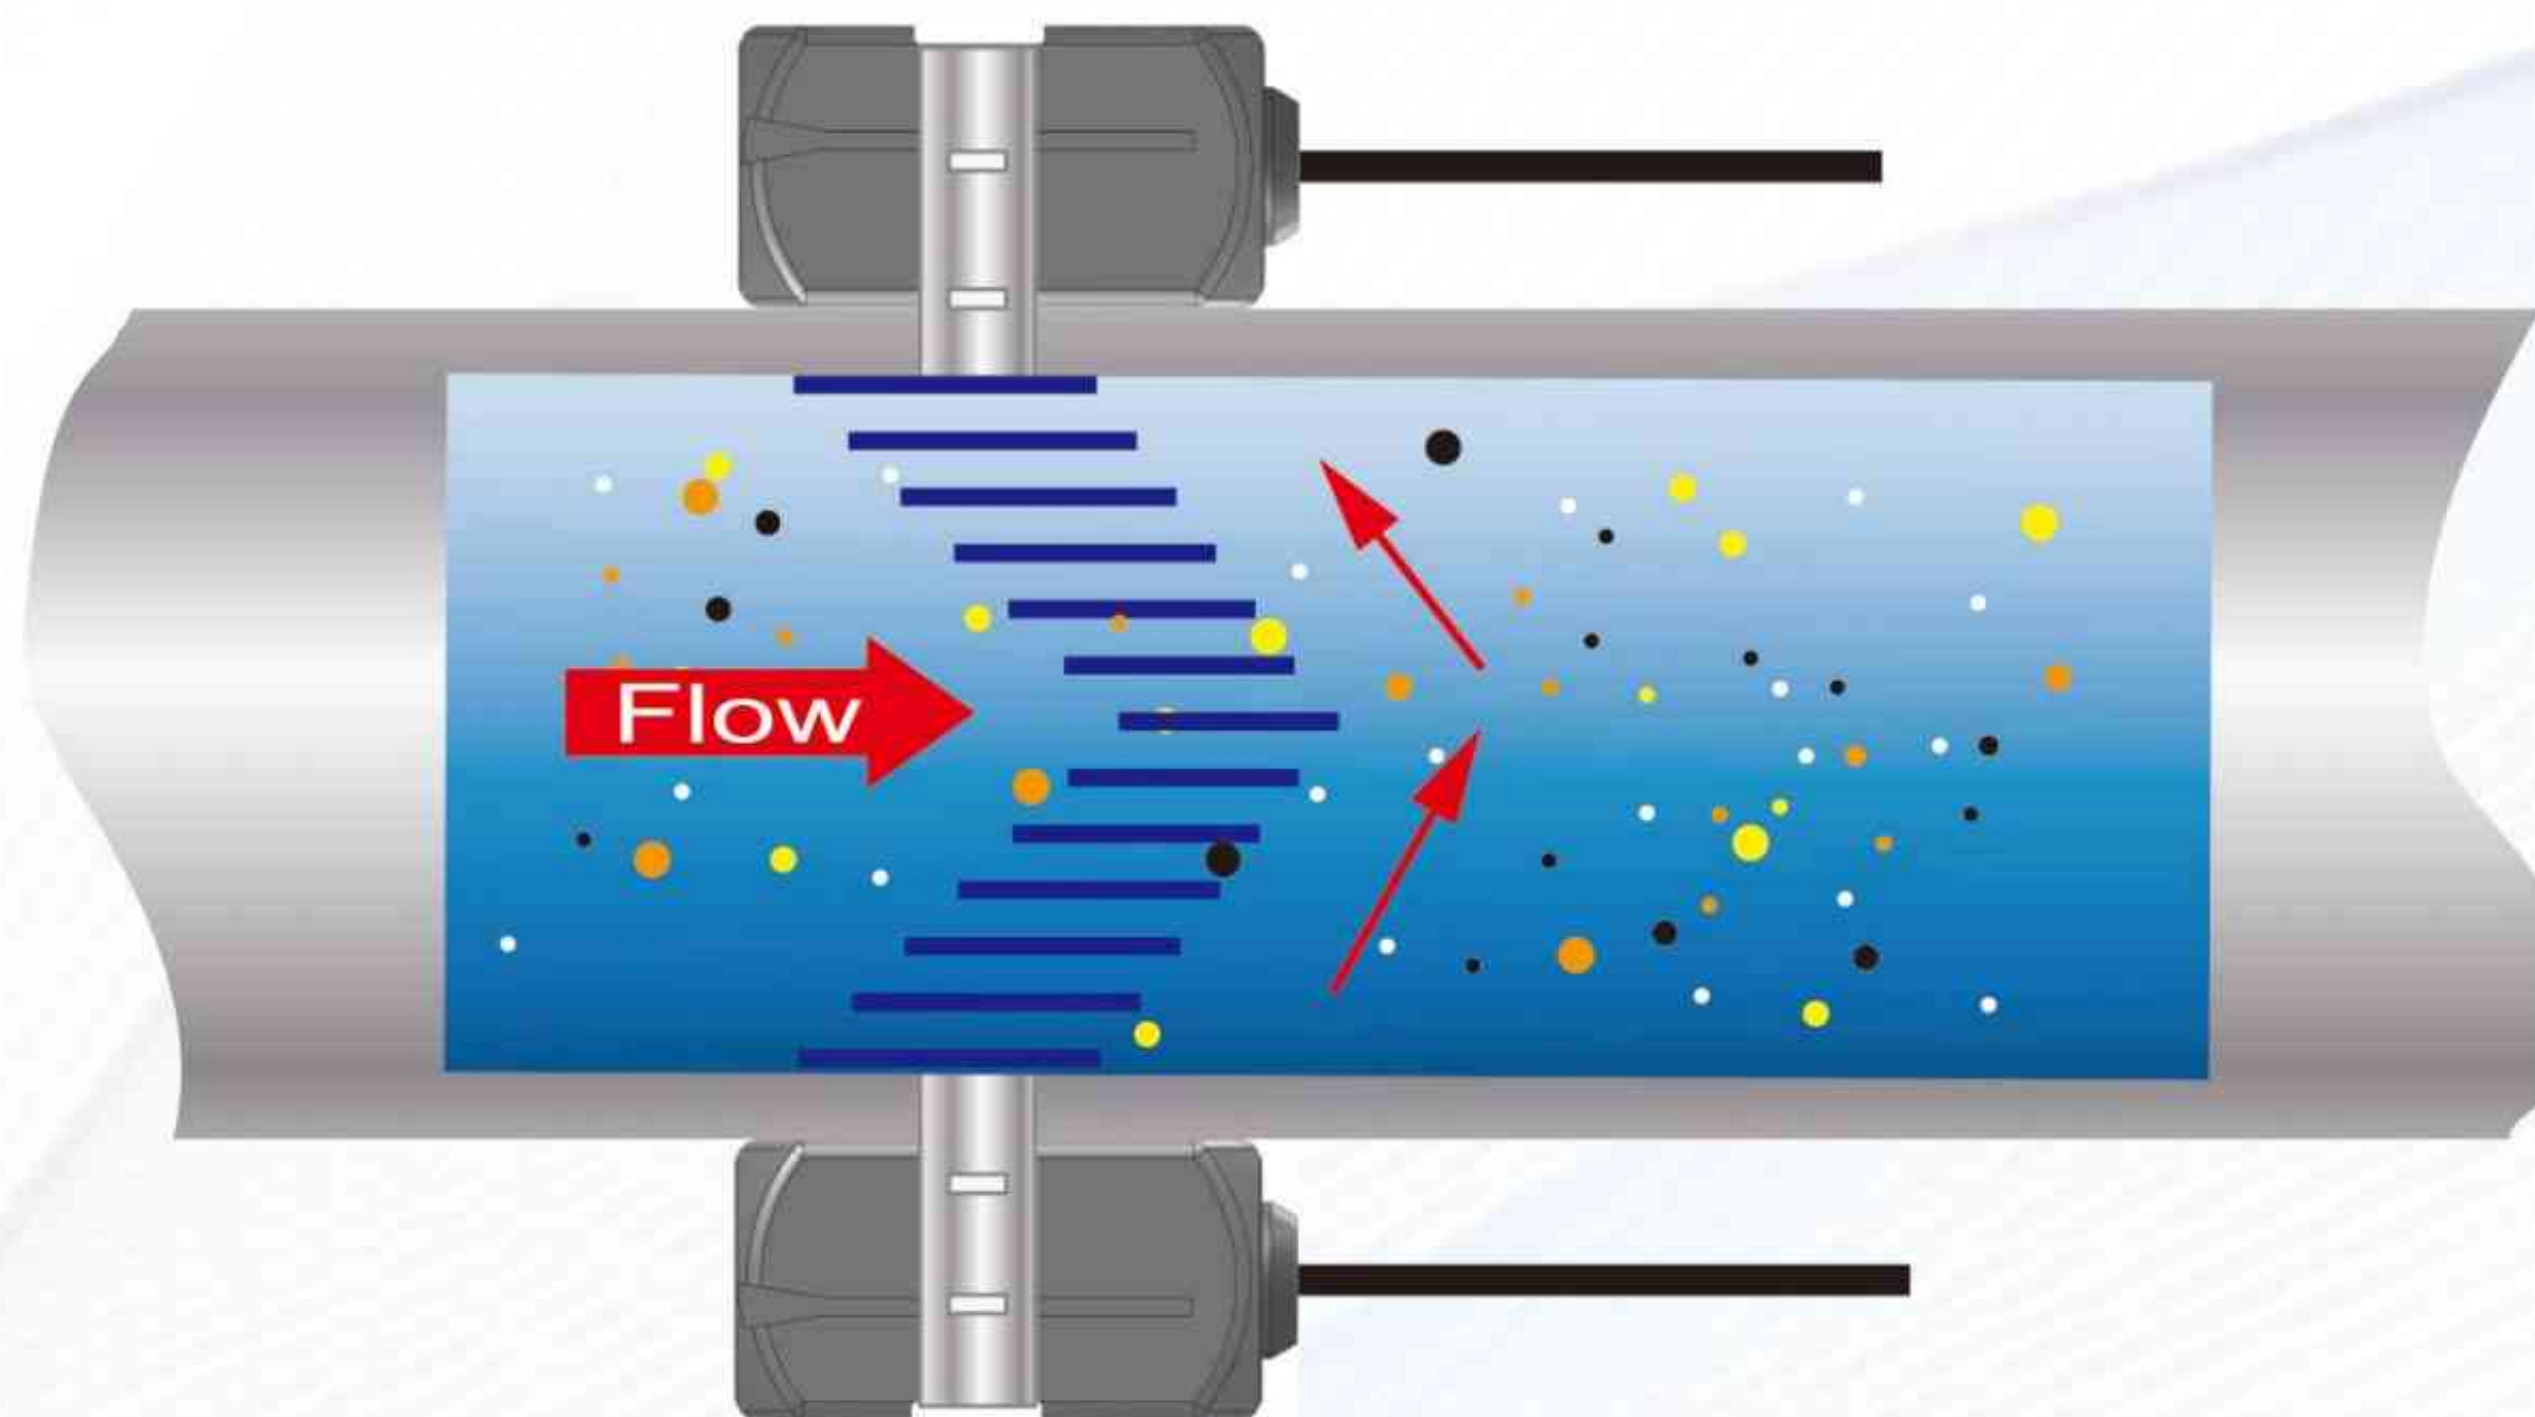

02

The flowmeter operates by transmitting an ultrasonic sound from its transmitting transducer, the sound will be reflected by useful sonic reflectors suspended within the liquid and recorded by the receiving transducer. If the sonic reflectors are moving within the sound transmission path, sound waves will be reflected at a frequency shifted (Doppler frequency) from the transmitted frequency. The shift in frequency will be directly related to the speed of the moving particle or bubble. This shift in frequency is interpreted by the instrument and converted to various user defined measuring units.

There must be some particles large enough to cause longitudinal reflection – particles larger than 100 micron.

When install the transducers, the installation location must have enough straight pipe length upstream and downstream. Commonly, the upstream needs 10D and downstream needs 5D straight pipe length, where D is pipe diameter.



Features:

- Rechargeable battery can work up to 50 hours.
- It is suitable for pipe sizes ranging from 40 to 4000mm.
- For dirty liquids, a certain amount of air bubbles or suspended solids shall be contained.
- Excellent low flow rate measurement ability, low to 0.05m/s.
- A wide range of flow measurement, high flow rate can reach 12m/s.
- High-temperature transducer is suitable to liquids of $-35^{\circ}\text{C} \sim 200^{\circ}\text{C}$.
- Do not need to shut down the pipe flow when installing the transducers.
- User-friendly configuration.
- 4-20mA, OCT outputs.

Specifications:

Transmitter:

Measurement principle	Doppler ultrasonic
Resolution	0.25mm/s
Repeatability	0.5% of reading
Accuracy	0.5% -- 2.0% F.S.
Response time	2-60s for optional
Flow Velocity Range	0.05- 12 m/s
Liquid Types Supported	Liquids containing 100ppm of reflectors and at least 20% of the reflectors are larger than 100 micron.
Power Supply	AC: 85-265V Up to 50 hours with fully charged internal batteries
Enclosure type	Portable
Degree of protection	IP65 according to EN60529
Operating temperature	-20°C to +60°C
Housing material	ABS
Measurement Channels	1
Display	2 line × 8 characters LCD, 8-digit rate or 8-digit total (resettable)
Units	User Configured (English and Metric)
Rate	Rate and Velocity Display
Totalized	gallons, ft ³ , barrels, lbs, liters, m ³ ,kg
Communication	4-20mA, OCT output
Keypad	6pcs buttons
Size	270X125X175mm
Weight	3kg

Transducer:

Transducers Type	Clamp-on
Degree of protection	IP65. IP67 or IP68 according to EN60529
Suited Liquid Temperature	Std. Temp.: -35°C~85°C High Temp.: -35°C~200°C
Pipe diameter range	40-4000 mm
Transducer Size	60(h)*34(w)*32(d)mm
Material of transducer	Aluminum (standard temperature); Peek (high temperature)
Cable Length	Std: 5m

Configuration Code:

DF6100-EP Portable Doppler Ultrasonic Flowmeter

Power supply

A 85-265VAC

Output Selection 1

N N/A

1 4-20mA

2 OCT

Output Selection 2

Same as above

Sensor Type

D Standard Clamp-on transducer (DN40-4000)

Transducer Temperature

S -35~85°C

H -35~200°C

Pipeline Diameter

DNX e.g.DN40—40mm, DN4000—4000mm

Cable length

5m 5m (standard 5m)

Xm Common cable Max 300m(standard 5m)

XmH High temp. cable Max 300m

DF6100-EP — A — 1 — N /LDP— D — S — DN600 — 5m (example configuration)

Description:

Power supply: 85-265VAC; output: 4-20mA; transducer type: standard for DN40-4000;transducer temperature: -35 ~ 85°C; DN600 application; 5m transducer cables.